


# UBS Implementation Guidelines

## Swiss Recommendations for Payment Status Report

pain.002.001.03.ch.02 - SR Version 1.0

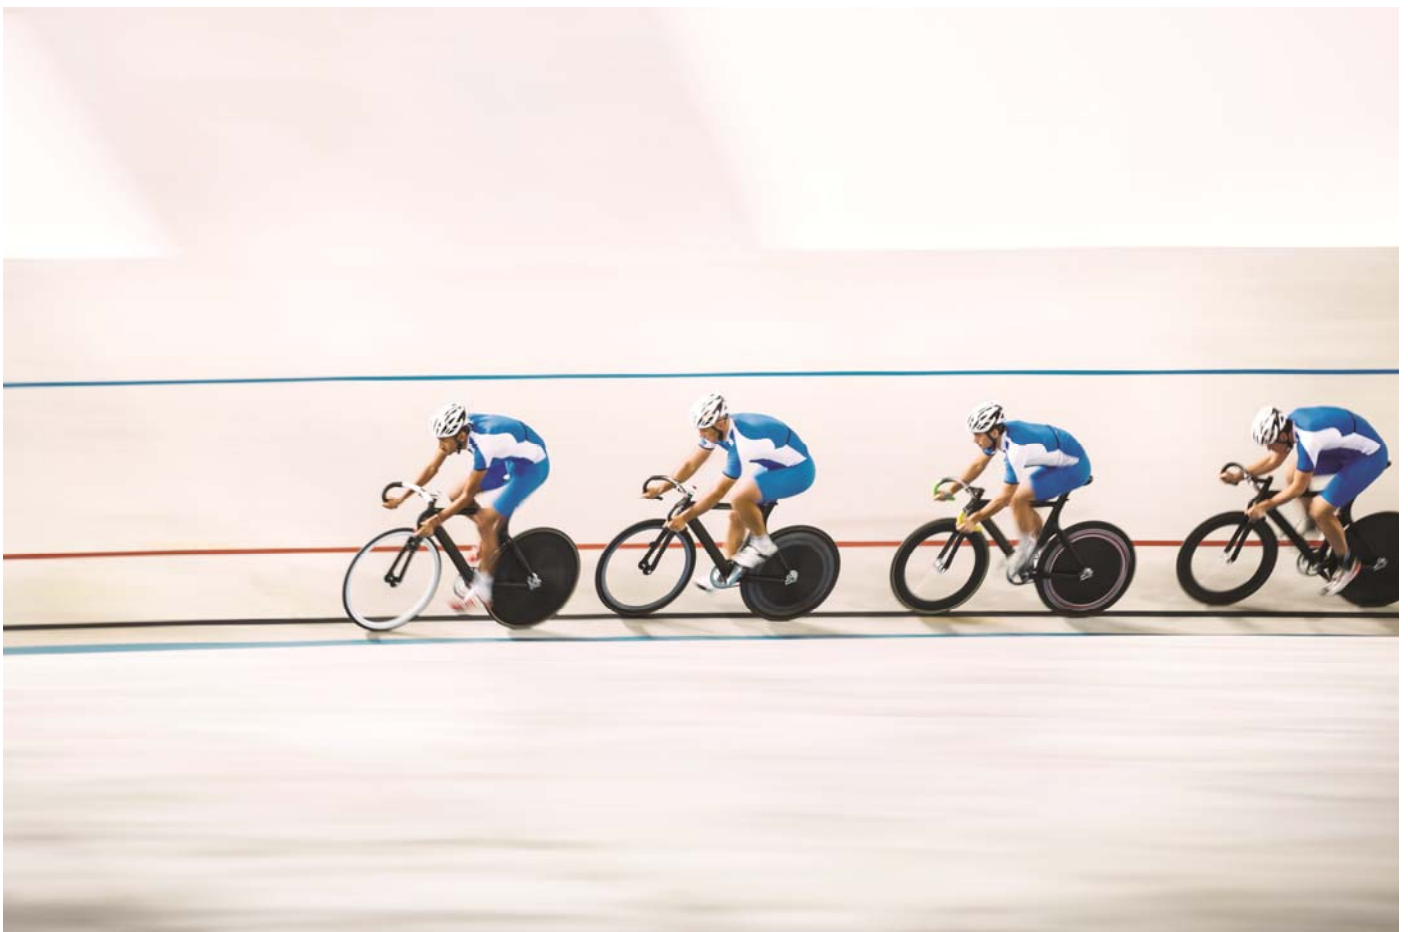

# Table of Contents

<b>1.</b>	<b>Payment Status Report</b>	<b>3</b>
1.1	Scope of application of this document	3
1.2	Flow of messages in accordance with Swiss Recommendations	3
<b>2.</b>	<b>Technical specifications</b>	<b>4</b>
2.1	UBS Implementation	4
2.2	Structure of pain.002 message	4
2.3	Explanation of statuses used in this chapter	4

# 1. Payment Status Report


## 1.1 Scope of application of this document

This brochure is designed to inform you about technical aspects of using the credit transfer message pain.002 at UBS. The document is valid within the following scope of application:

Characteristics	Scope of application
Use of message	Swiss Recommendations for credit transfers for domestic and international transfers
Product	Payment Status Report
Service	Payment order
Message type available to	Debtor
Recommendation	Swiss Recommendations
Schema	pain.002.001.03.ch.02
Implementation Guide Version	1.0 - 25.07.2016
Replaces old messages	na
Available through UBS electronic interfaces	For clients of UBS Switzerland <ul style="list-style-type: none"> <li>• UBS KeyPort</li> </ul>

## 1.2 Flow of messages in accordance with Swiss Recommendations

The message standard recommended by Swiss financial institutions, the Swiss Recommendations, is based on the ISO 20022 Payments Standard. The chart below provides an overview of the flow of messages currently supported by UBS and shows the use of pain.002 in the context of the end-to-end message flow:

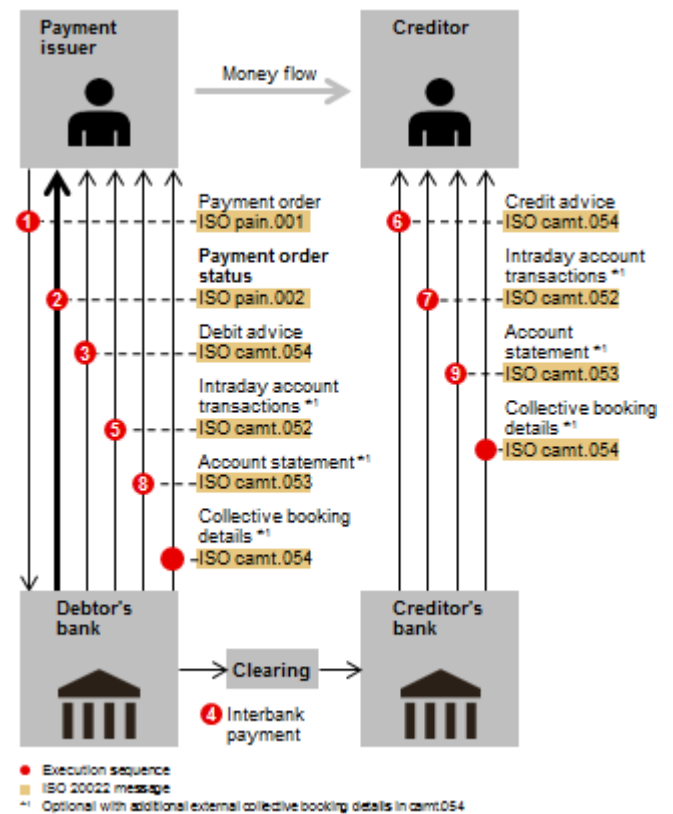

# 2. Technical specifications

## 2.1 UBS Implementation

The UBS Implementation Guideline for Payment Status Report – this document – contains technical specifications and instructions for the technical and business implementation of Payment Status Report pain.002 message in accordance with the Swiss Recommendations (see section 1.1) and consequently also the ISO 20022 Payments Standard.


All Payment Status Report messages transmitted from UBS comply with the ISO 20022 Payments Standard, Swiss Recommendations and the UBS Implementation as outlined in this document.

The diagram beside shows the interaction of the ISO 20022 Payments Standard, Swiss Recommendations and UBS Implementation with a link to the respective rules and guidelines that must be adhered to.

## 2.2 Structure of pain.002 message

The pain.002 XML message is essentially structured as follows:

- **A-Level:** message level, "Group Header". This block must occur exactly once.
- **B-Level:** information about the original message level, "Original Group Information And Status". This block must be present exactly once.
- **C-Level:** Information about the original order information, "Original Payment Information And Status". This block can be present up to "n" times.
- **D-Level:** Information about the original transactions, "Transaction Information And Status". This block can be present up to "n" times.

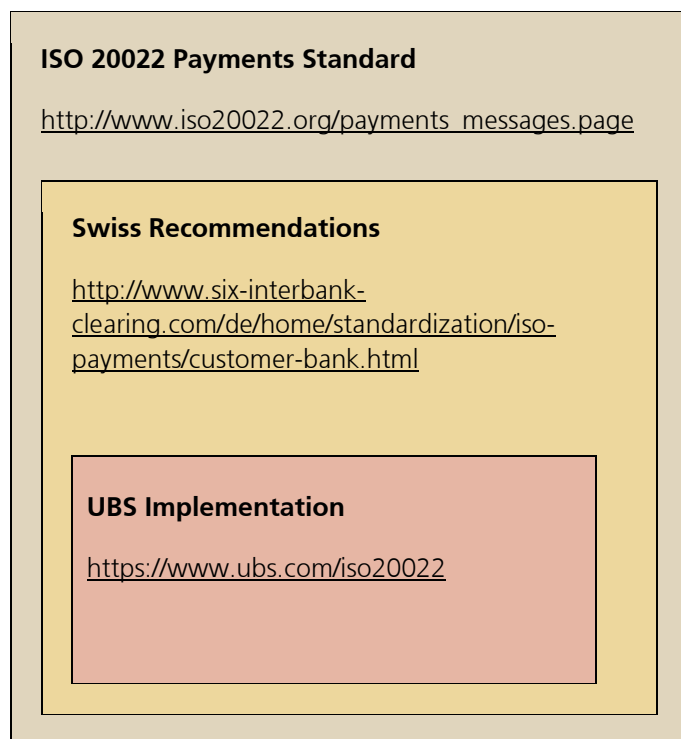

## 2.3 Explanation of statuses used in this chapter

The following statuses (information about usage) are permitted for individual XML elements according to the Swiss Recommendations (Implementation Guidelines V1.0 and Business Rules V2.6) based on the ISO 20022 Payments Standard.

<b>M</b>	=	Mandatory
<b>R</b>	=	Recommended (should be used)
<b>D</b>	=	Dependent (depending on other elements)
<b>O</b>	=	Optional

Level	XML Element	Definition
A	Document +CstmrPmtStsRpt  Cardinality: 1..1 Status:	ISO Name: <b>Customer Payment Status Report V03</b> XML Name: CstmrPmtStsRpt ISO Definition: The CustomerPaymentStatusReport message is sent by an instructed agent to the payment initiator. It is used to inform this party about the positive or negative status of an instruction (either single, group or file). It is also used to report on a pending instruction.
A	Document +CstmrPmtStsRpt ++Group Header  ISO Index: 1.0 Cardinality: 1..1 Status: M	ISO Name: <b>Group Header</b> XML Name: GrpHdr ISO Definition: Set of characteristics shared by all individual transactions included in the status report message.
A	Document +CstmrPmtStsRpt ++Group Header +++Message Identification  ISO Index: 1.1 Cardinality: 1..1 Status: M Length: 1 ..35	ISO Name: <b>Message Identification</b> XML Name: MsgId ISO Definition: Point to point reference, as assigned by the instructing party, and sent to the next party in the chain to unambiguously identify the message. Usage: The instructing party has to make sure that 'MessageIdentification' is unique per instructed party for a pre-agreed period. CH Definition: Unique message reference, assigned to the message by the sender. UBS Example: <MsgId>3811.D20160718T093810</MsgId>
A	Document +CstmrPmtStsRpt ++Group Header +++Creation Date Time  ISO Index: 1.2 Cardinality: 1..1 Status: M	ISO Name: <b>Creation Date Time</b> XML Name: CreDtTm ISO Definition: Date and time at which the message was created. Recommendation: Should be the same as the actual date of creation. UBS Example: <CreDtTm>2016-07-18T07:38:10.894Z</CreDtTm>
A	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party  ISO Index: 1.3 Cardinality: 1..1 Status: D	ISO Name: <b>Initiating Party</b> XML Name: InitgPty ISO Definition: Party that initiates the status message. CH Definition: Sender of the message One or more sub-elements can be used to give details of the sender.
A	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Name  ISO Index: 1.3 Cardinality: 0..1 Status: O Length: 1 ..70	ISO Name: <b>Name</b> XML Name: Nm ISO Definition: Name by which a party is known and which is usually used to identify that party. CH Definition: Name of the sender of the message, maximum 70 characters UBS Notes: UBS does not provide this element.
A	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification  ISO Index: 1.3 Cardinality: 0..1 Status: O	ISO Name: <b>Identification</b> XML Name: Id ISO Definition: Unique and unambiguous identification of a party. CH Definition: Identification of the sender of the message
A	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party	ISO Name: <b>Organisation Identification</b> XML Name: OrgId ISO Definition: Unique and unambiguous way to identify an organisation.

Level	XML Element	Definition
	++++Identification +++++Organisation Identification  ISO Index: 1.3 Cardinality: 1..1 Status: D	CH Definition: Only "BIC Or BEI" or an element of "Other" permitted. If used, the "Private Identification" must not be present.  UBS Notes: UBS only provides <OrgID> with <BICOrBEI>.
<b>A</b>	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Organisation Identification ++++++BICOrBEI  Cardinality: 0..1 Status: D	ISO Name: <b>BICOr BEI</b> XML Name: BICOrBEI ISO Definition: Code allocated to a financial institution or non financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)".  UBS Notes: Always "UBSWCHZH80A" UBS Example: <BICOrBEI>UBSWCHZH80A</BICOrBEI>
<b>A</b>	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Organisation Identification ++++++Other  Cardinality: 0..1 Status: D	ISO Name: <b>Other</b> XML Name: Othr ISO Definition: Unique identification of an organisation, as assigned by an institution, using an identification scheme.
<b>A</b>	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Organisation Identification ++++++Other ++++++Identification  Cardinality: 1..1 Status: M Length: 1 ..35	ISO Name: <b>Identification</b> XML Name: Id ISO Definition: Identification assigned by an institution. UBS Notes: UBS provides this information if sent in the incoming pain.001.001.03.ch.02 file
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Organisation Identification ++++++Other ++++++Scheme Name  Cardinality: 0..1 Status: O	ISO Name: <b>Scheme Name</b> XML Name: SchmeNm ISO Definition: Name of the identification scheme.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Organisation Identification ++++++Other ++++++Scheme Name ++++++Code  Cardinality: 1..1 Status: D Length: 1 ..4	ISO Name: <b>Code</b> XML Name: Cd ISO Definition: Name of the identification scheme, in a coded form as published in an external list.
	Document +CstmrPmtStsRpt ++Group Header	ISO Name: <b>Proprietary</b> XML Name: Prtry ISO Definition: Name of the identification scheme, in a free text form.

Level	XML Element	Definition
	+++Initiating Party ++++Identification +++++Organisation Identification ++++++Other +++++++Scheme Name ++++++++Proprietary  Cardinality: 1..1 Status: D Length: 1 ..35	
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Organisation Identification ++++++Other +++++++Issuer  Cardinality: 0..1 Status: O Length: 1 ..35	ISO Name: <b>Issuer</b> XML Name: Issr ISO Definition: Entity that assigns the identification.
<b>A</b>	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification  ISO Index: 1.3 Cardinality: 1..1 Status: D	ISO Name: <b>Private Identification</b> XML Name: PrvtId ISO Definition: Unique and unambiguous identification of a person, eg, passport. CH Definition: Only "Date And Place Of Birth" or an element of "Other" permitted. If used, the "Organisation Identification" must not be present. UBS Notes: UBS does not provide this element.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Date And Place Of Birth  Cardinality: 0..1 Status: D	ISO Name: <b>Date And Place Of Birth</b> XML Name: DtAndPlcOfBirth ISO Definition: Date and place of birth of a person.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Date And Place Of Birth +++++++Birth Date  Cardinality: 1..1 Status: M	ISO Name: <b>Birth Date</b> XML Name: BirthDt ISO Definition: Date on which a person is born.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Date And Place Of Birth +++++++Province Of Birth  Cardinality: 0..1 Status: O Length: 1 ..35	ISO Name: <b>Province Of Birth</b> XML Name: PrvcOfBirth ISO Definition: Province where a person was born.

Level	XML Element	Definition
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Date And Place Of Birth ++++++City Of Birth  Cardinality: 1..1 Status: M Length: 1 ..35	ISO Name: <b>City Of Birth</b> XML Name: CityOfBirth ISO Definition: City where a person was born.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Date And Place Of Birth ++++++CtryOfBirth  Cardinality: 1..1 Status: M	ISO Name: <b>Country Of Birth</b> XML Name: CtryOfBirth ISO Definition: Country where a person was born.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Other  Cardinality: 0..1 Status: D	ISO Name: <b>Other</b> XML Name: Othr ISO Definition: Unique identification of a person, as assigned by an institution, using an identification scheme.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Other ++++++Identification  Cardinality: 1..1 Status: M Length: 1 ..35	ISO Name: <b>Identification</b> XML Name: Id ISO Definition: Unique and unambiguous identification of a person.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Other ++++++Scheme Name  Cardinality: 0..1 Status: O	ISO Name: <b>Scheme Name</b> XML Name: SchmeNm ISO Definition: Name of the identification scheme.
	Document +CstmrPmtStsRpt ++Group Header +++Initiating Party ++++Identification +++++Private Identification ++++++Other ++++++Scheme Name ++++++Code	ISO Name: <b>Code</b> XML Name: Cd ISO Definition: Name of the identification scheme, in a coded form as published in an external list.



Level	XML Element	Definition
	<p>Cardinality: 1..1                      Status: D                      Length: 1 ..4</p>	
	<p>Document                      +CstmrPmtStsRpt                      ++Group Header                      +++Initiating Party                      ++++Identification                      +++++Private Identification                      ++++++Other                      +++++++Scheme Name                      ++++++++Proprietary</p> <p>Cardinality: 1..1                      Status: D                      Length: 1 ..35</p>	<p>ISO Name: <b>Proprietary</b>                      XML Name: Prtry                      ISO Definition: Name of the identification scheme, in a free text form.</p>
	<p>Document                      +CstmrPmtStsRpt                      ++Group Header                      +++Initiating Party                      ++++Identification                      +++++Private Identification                      ++++++Other                      ++++++Issuer</p> <p>Cardinality: 0..1                      Status: O                      Length: 1 ..35</p>	<p>ISO Name: <b>Issuer</b>                      XML Name: Issr                      ISO Definition: Entity that assigns the identification.</p>
<b>A</b>	<p>Document                      +CstmrPmtStsRpt                      ++Group Header                      +++Debtor Agent</p> <p>ISO Index: 1.5                      Cardinality: 0..1                      Status: D</p>	<p>ISO Name: <b>Debtor Agent</b>                      XML Name: DbtrAgt                      ISO Definition: Financial institution servicing an account for the debtor.                      CH Definition: Sender of the message                      Can be used if the "Debtor Agent" is the sender of the message.                      Only BIC or the IID are permitted under "Clearing System Member Identification/Member Identification".</p> <p>Note: Element is only used for Credit Transfer (original message "pain.001").</p> <p><b>UBS Notes:</b> UBS does not provide this element.</p>
	<p>Document                      +CstmrPmtStsRpt                      ++Group Header                      +++Debtor Agent                      ++++Financial Institution Identification</p> <p>Cardinality: 1..1                      Status: D</p>	<p>ISO Name: <b>Financial Institution Identification</b>                      XML Name: FinInstnld                      ISO Definition: Unique and unambiguous identification of a financial institution, as assigned under an internationally recognised or proprietary identification scheme.</p>
	<p>Document                      +CstmrPmtStsRpt                      ++Group Header                      +++Debtor Agent                      ++++Branch Identification</p> <p>Cardinality: 0..1                      Status: D</p>	<p>ISO Name: <b>Branch Identification</b>                      XML Name: Brnchld                      ISO Definition: Identifies a specific branch of a financial institution.</p> <p>Usage: This component should be used in case the identification information in the financial institution component does not provide identification up to branch level.</p>
<b>A</b>	<p>Document                      +CstmrPmtStsRpt                      ++Group Header                      +++Creditor Agent</p> <p>ISO Index: 1.6</p>	<p>ISO Name: <b>Creditor Agent</b>                      XML Name: CdtrAgt                      ISO Definition: Financial institution servicing an account for the creditor.                      CH Definition: Sender of the message                      Can be used if the "Creditor Agent" is the sender of</p>

Level	XML Element	Definition
	Cardinality: 0..1 Status: D	the message. Only BIC or the IID are permitted under "Clearing System Member Identification/Member Identification".  Note: Element is only used for Direct Debit (original message "pain.008"). UBS Notes: UBS does not provide this element.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts  ISO Index: 2.0 Cardinality: 1..1 Status: M	ISO Name: <b>Original Group Information And Status</b> XML Name: OrgnlGrplnfAndSts ISO Definition: Original group information concerning the group of transactions, to which the status report message refers to.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++Original Message Identification  ISO Index: 2.1 Cardinality: 1..1 Status: M Length: 1 ..35	ISO Name: <b>Original Message Identification</b> XML Name: OrgnlMsgId ISO Definition: Point to point reference, as assigned by the original instructing party, to unambiguously identify the original message.  CH Definition: "Message Identification" from the original "pain.001" or "pain.008" message. If the message identification could not be identified, then "UNKNOWN" is sent back here.  UBS Example: <OrgnlMsgId>MSGID-101-160321173741-00</OrgnlMsgId>
	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++Original Message Name Identification  ISO Index: 2.2 Cardinality: 1..1 Status: M Length: 1 ..35	ISO Name: <b>Original Message Name Identification</b> XML Name: OrgnlMsgNmId ISO Definition: Specifies the original message name identifier to which the message refers.  CH Definition: Name of message "pain.001..." or "pain.008..." If the message could not be identified, then "UNKNOWN" is sent back here.  UBS Example: <OrgnlMsgNmId>pain.001.001.03.ch.02</OrgnlMsgNmId>
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++Group Status  ISO Index: 2.6 Cardinality: 0..1 Status: D	ISO Name: <b>Group Status</b> XML Name: GrpSts ISO Definition: Specifies the status of a group of transactions. CH Definition: The values "ACCP", "ACWC", "PART" and "RJCT" are sent in the status report. Responses of a technical kind may also contain the status "ACTC". Depending on the financial institution and the delivery channel, the "Group Status" may not be required. Deviating from the SEPA recommendations, in Switzerland positive "Group Status" messages are also sent back.  UBS Notes: UBS provides the following status for Credit Transfer (pain.001) files: ACCP – Accepted RJCT – Rejected PART – Partial rejection of the file ACWC – Accepted With Change  UBS Example: <GrpSts>PART</GrpSts>
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnInf  ISO Index: 2.7 Cardinality: 0..unbounded Status: D	ISO Name: <b>Status Reason Information</b> XML Name: StsRsnInf ISO Definition: Set of elements used to provide detailed information on the status reason.  CH Definition: Sent if there are errors/warnings at A-Level. Note: • "Status Reason Information" is used at no more than one level within a message, either in - "Original Group Information And Status" or - "Original Payment Information And Status" or - "Transaction Information And Status". • If "Group Status" = "ACCP" the "Status Reason Information" is not used.

Level	XML Element	Definition
		<ul style="list-style-type: none"> <li>• If "Group Status" = "PART" the "Status Reason Information" is used either at the level "Original Payment Information And Status" or "Transaction Information And Status".</li> <li>• If "Group Status" = "RJCT" because all B-Levels have been rejected, the "Status Reason Information" is used at the level "Original Payment Information and Status".</li> <li>• If "Group Status" = "RJCT" because all C-Levels have been rejected, the "Status Reason Information" is used at the level "Transaction Information And Status".</li> </ul>
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnlnf ++++Originator  ISO Index: 2.8 Cardinality: 0..1 Status: D	ISO Name: <b>Originator</b> XML Name: Orgtr ISO Definition: Party that issues the status. CH Definition: Originator of the status information Can be used if the originator of the status information is not the sender of the message ("Group Header/Initiating Party" or "Group Header/Creditor Agent").  UBS Notes: UBS does not provide this element.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnlnf ++++Originator +++++Name  ISO Index: 2.8 Cardinality: 0..1 Status: D Length: 1 ..70	ISO Name: <b>Name</b> XML Name: Nm ISO Definition: Name by which a party is known and which is usually used to identify that party. CH Definition: Name of the originator To be used if no BIC is available.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnlnf ++++Originator +++++Identification  ISO Index: 2.8 Cardinality: 0..1 Status: D	ISO Name: <b>Identification</b> XML Name: Id ISO Definition: Unique and unambiguous identification of a party. CH Definition: If this is used, the "Name" must not be present.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnlnf ++++Originator +++++Identification ++++++Organisation Identification  ISO Index: 2.8 Cardinality: 1..1 Status: M	ISO Name: <b>Organisation Identification</b> XML Name: Orgld ISO Definition: Unique and unambiguous way to identify an organisation. CH Definition: Must be used if "Identification" is used.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnlnf ++++Originator +++++Identification ++++++Organisation Identification ++++++BICOrBEI  ISO Index: 2.8	ISO Name: <b>BICOr BEI</b> XML Name: BICOrBEI ISO Definition: Code allocated to a financial institution or non financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)". CH Definition: BIC of the originator

Level	XML Element	Definition
	Cardinality: 0..1 Status: M	
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnInf ++++Originator +++++Identification ++++++Private Identification  ISO Index: 2.8 Cardinality: 1..1 Status: N	ISO Name: <b>Private Identification</b> XML Name: PrvtId ISO Definition: Unique and unambiguous identification of a person, eg, passport.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnInf ++++Reason  ISO Index: 2.9 Cardinality: 0..1 Status: M	ISO Name: <b>Reason</b> XML Name: Rsn ISO Definition: Specifies the reason for the status report. CH Definition: Reason for the status
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnInf ++++Reason +++++Code  ISO Index: 2.10 Cardinality: 1..1 Status: D Length: 1 ..4	ISO Name: <b>Code</b> XML Name: Cd ISO Definition: Reason for the status, as published in an external reason code list. CH Definition: Code as described in section "Status Reason Codes" If used, then "Proprietary" must not be present.  <b>UBS Notes:</b> UBS supports all Codes according to Swiss recommendations. In case of a scheme error (e.g. delivered Code not covered by the scheme) the whole file is rejected with status code FF01. For individual status information, the ISO-Code NARR is sent in the Code element and the relevant information is entered in the Additional Information element.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnInf ++++Reason +++++Proprietary  ISO Index: 2.11 Cardinality: 1..1 Status: D Length: 1 ..35	ISO Name: <b>Proprietary</b> XML Name: Prtry ISO Definition: Reason for the status, in a proprietary form. CH Definition: Swiss financial institutions will, wherever possible, abide by ISO standards ("Code" element). If used, then "Code" must not be present.  <b>UBS Notes:</b> UBS does not provide this element.
<b>B</b>	Document +CstmrPmtStsRpt ++OrgnlGrplnfAndSts +++StsRsnInf ++++Additional Information  ISO Index: 2.12 Cardinality: 0..unbounded Status: O Length: 1 ..105	ISO Name: <b>Additional Information</b> XML Name: AddtlInf ISO Definition: Further details on the status reason.  Usage: Additional information can be used for several purposes such as the reporting of repaired information. CH Definition: Can be used optionally to provide additional information about the "Reason".  <b>UBS Notes:</b> Used by UBS to provide additional information, if applicable.
<b>C</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts  ISO Index: 3.0 Cardinality: 0..unbounded Status: D	ISO Name: <b>Original Payment Information And Status</b> XML Name: OrgnlPmtInfAndSts ISO Definition: Information concerning the original payment information, to which the status report message refers. CH Definition: Is sent if there are errors/warnings at B-/C-Level of the original "pain.001" or "pain.008" message.
<b>C</b>	Document	ISO Name: <b>Original Payment Information Identification</b>

Level	XML Element	Definition
	+CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Original Payment Information Identification  ISO Index: 3.1 Cardinality: 1..1 Status: M Length: 1..35	XML Name: OrgnlPmtInfId ISO Definition: Unique identification, as assigned by the original sending party, to unambiguously identify the original payment information group. CH Definition: "Payment Information Identification" (B-Level) from the original "pain.001" or "pain.008" message (or "NOTPROVIDED"). Is always sent if there are errors/warnings at B- or C-Level.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Payment Information Status  ISO Index: 3.4 Cardinality: 0..1 Status: D	ISO Name: <b>Payment Information Status</b> XML Name: PmtInfSts ISO Definition: Specifies the status of the payment information group. CH Definition: This element is sent if there are errors/warnings at B-Level of the order (pain.001/pain.008). Only "ACWC", "PART", "RJCT" are sent, no other interim status. Deviating from SEPA, positive "Payment Information-Status" messages are also sent back. Additional status messages may include other values, such as "ACTC" for instance (after a purely technical validation of the received message) or "ACCP" (status message due to a status change of an order or as a response to individual B-Levels).  UBS Notes: UBS provides the status ACWC, PART and RJCT. UBS Example: <PmtInfSts>PART</PmtInfSts>
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf  ISO Index: 3.5 Cardinality: 0..unbounded Status: D	ISO Name: <b>Status Reason Information</b> XML Name: StsRsnInf ISO Definition: Set of elements used to provide detailed information on the status reason. CH Definition: Is sent if there are errors/warnings at B-Level. Note: <ul style="list-style-type: none"> <li>• "Status Reason Information is used at no more than one level within a message, either in <ul style="list-style-type: none"> <li>- "Original Group Information And Status" or</li> <li>- "Original Payment Information And Status" or</li> <li>- "Transaction Information And Status".</li> </ul> </li> <li>• If "PmtInfSts" = "ACWC" because warnings at C-Level have occurred, the "Status Reason Information" is used at the level "Transaction Information And Status".</li> <li>• If "PmtInfSts" = "PART" the "Status Reason Information" is used at the level "Transaction Information And Status".</li> <li>• If "PmtInfSts" = "RJCT" because all C-Levels have been rejected, the "Status Reason Information" is used at the level "Transaction Information And Status".</li> </ul>
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Originator  ISO Index: 3.6 Cardinality: 0..1 Status: D	ISO Name: <b>Originator</b> XML Name: Orgtr ISO Definition: Party that issues the status. CH Definition: Originator of the status information Can be used if the originator of the status information is not the sender of the message ("Group Header/Initiating Party" or "Group Header/Creditor Agent").  UBS Notes: UBS does not provide this element.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Originator +++++Name  ISO Index: 3.6 Cardinality: 0..1	ISO Name: <b>Name</b> XML Name: Nm ISO Definition: Name by which a party is known and which is usually used to identify that party. CH Definition: Name of the originator To be used if no "BIC/BEI" is available. If this is used, the "Identification" must not be present.

Level	XML Element	Definition
	Status: D Length: 1..70	
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Originator +++++Identification  ISO Index: 3.6 Cardinality: 0..1 Status: D	ISO Name: <b>Identification</b> XML Name: Id ISO Definition: Unique and unambiguous identification of a party. CH Definition: If this is used, the "Name" must not be present.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Originator +++++Identification ++++++Organisation Identification  ISO Index: 3.6 Cardinality: 1..1 Status: M	ISO Name: <b>Organisation Identification</b> XML Name: OrgId ISO Definition: Unique and unambiguous way to identify an organisation. CH Definition: Must be used if "Identification" is used.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Originator +++++Identification ++++++Organisation Identification +++++++BICOrBEI  ISO Index: 3.6 Cardinality: 0..1 Status: M	ISO Name: <b>BICOr BEI</b> XML Name: BICOrBEI ISO Definition: Code allocated to a financial institution or non financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)". CH Definition: BIC/BEI of the originator Must be used if "Identification" is used.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Originator +++++Identification ++++++Private Identification  ISO Index: 3.6 Cardinality: 1..1 Status: N	ISO Name: <b>Private Identification</b> XML Name: PrvtId ISO Definition: Unique and unambiguous identification of a person, eg, passport.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Reason  ISO Index: 3.7 Cardinality: 0..1 Status: M	ISO Name: <b>Reason</b> XML Name: Rsn ISO Definition: Specifies the reason for the status report. CH Definition: Reason for the status Must be used if "Status Reason Information" is used.
C	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Reason +++++Code  ISO Index: 3.8	ISO Name: <b>Code</b> XML Name: Cd ISO Definition: Reason for the status, as published in an external reason code list. CH Definition: Code as described in section "Status Reason Codes" If this is used, "Proprietary" must not be present.  UBS Notes: UBS supports all Codes according to Swiss recommendations. For individual status information,

Level	XML Element	Definition
	Cardinality: 1..1 Status: D Length: 1 ..4	the ISO-Code NARR is sent in the Code element and the relevant information is entered in the Additional Information element.  UBS Example: <pre>&lt;StsRsnInf&gt;   &lt;Rsn&gt;     &lt;Cd&gt;AC01&lt;/Cd&gt;   &lt;/Rsn&gt;   &lt;AddtlInf&gt;(Creditor Account IBAN) Invalid IBAN check digit&lt;/AddtlInf&gt; &lt;/StsRsnInf&gt;</pre>
<b>C</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Reason +++++Proprietary  ISO Index: 3.9 Cardinality: 1..1 Status: D Length: 1 ..35	ISO Name: <b>Proprietary</b> XML Name: Prtry ISO Definition: Reason for the status, in a proprietary form. CH Definition: Swiss financial institutions will, wherever possible, abide by ISO standards ("Code" element). If used, then "Code" must not be present.  UBS Notes: UBS does not provide this element.
<b>C</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++StsRsnInf ++++Additional Information  ISO Index: 3.10 Cardinality: 0..unbounded Status: O Length: 1 ..105	ISO Name: <b>Additional Information</b> XML Name: AddtlInf ISO Definition: Further details on the status reason.  Usage: Additional information can be used for several purposes such as the reporting of repaired information. CH Definition: Can be used optionally to provide additional information about the "Reason".  UBS Notes: Used by UBS to provide additional information, if applicable.
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status  ISO Index: 3.15 Cardinality: 0..unbounded Status: D	ISO Name: <b>Transaction Information And Status</b> XML Name: TxInfAndSts ISO Definition: Set of elements used to provide information on the original transactions to which the status report message refers.  CH Definition: Is sent if there are errors/warnings at C-Level of the original "pain.001" or "pain.008" message.
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Status Identification  ISO Index: 3.16 Cardinality: 0..1 Status: O Length: 1 ..35	ISO Name: <b>Status Identification</b> XML Name: StsId ISO Definition: Unique identification, as assigned by an instructing party for an instructed party, to unambiguously identify the reported status. Usage: The instructing party is the party sending the status message and not the party that sent the original instruction that is being reported on. CH Definition: Unique identification, set by the originator of this message.  UBS Notes: UBS does not provide this element.
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Instruction Identification  ISO Index: 3.17 Cardinality: 0..1 Status: D Length: 1 ..35	ISO Name: <b>Original Instruction Identification</b> XML Name: OrgnlInstrId ISO Definition: Unique identification, as assigned by the original instructing party for the original instructed party, to unambiguously identify the original instruction. CH Definition: "Instruction Identification" (C-Level) from the original message. Is always sent if there are errors/warnings at C-Level (if not available, then "NOTPROVIDED" is sent).  UBS Notes: UBS reports this element on pain.002 D-Level if the original pain.001 contains error(s) on C-Level. If Instruction ID is not delivered in pain.001, this element is filled with NOTPROVIDED.

Level	XML Element	Definition
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original End To End Identification  ISO Index: 3.18 Cardinality: 0..1 Status: D Length: 1 ..35	ISO Name: <b>Original End To End Identification</b> XML Name: OrgnlEndToEndId ISO Definition: Unique identification, as assigned by the original initiating party, to unambiguously identify the original transaction. CH Definition: "End To End Identification" (C-Level) from the original message. Is always sent if there are errors/warnings at C-Level (if not available or empty, then "NOTPROVIDED" is sent).  UBS Notes: UBS reports this element on pain.002 D-Level if the original pain.001 contains error(s) on C-Level. If the EndToEndId is not delivered, then respectively C-Level of the pain.001 will be rejected and 'NOTPROVIDED' is mapped in the pain.002 message.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Transaction Status  ISO Index: 3.19 Cardinality: 0..1 Status: D	ISO Name: <b>Transaction Status</b> XML Name: TxSts ISO Definition: Specifies the status of a transaction, in a coded form. CH Definition: Is sent if there are errors/warnings at C-Level. Only "ACWC" and "RJCT" are sent, no other interim status. "ACCP" is not sent explicitly.  UBS Notes: UBS provides the status ACWC and RJCT. UBS Example: <TxSts>RJCT</TxSts>
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf  ISO Index: 3.20 Cardinality: 0..unbounded Status: D	ISO Name: <b>Status Reason Information</b> XML Name: StsRsnInf ISO Definition: Set of elements used to provide detailed information on the status reason. CH Definition: Is sent if there are errors/warnings at C-Level. Note: "Status Reason Information" is used at no more than one level within a message, either in - "Original Group Information And Status" or - "Original Payment Information And Status" or - "Transaction Information And Status".
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Originator  ISO Index: 3.21 Cardinality: 0..1 Status: D	ISO Name: <b>Originator</b> XML Name: Orgtr ISO Definition: Party that issues the status. CH Definition: Originator of the status information Can be used if the originator of the status information is not the sender of the message ("Group Header/ Initiating Party" or "Group Header/Creditor Agent").  UBS Notes: UBS does not provide this element.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Originator ++++++Name  ISO Index: 3.21 Cardinality: 0..1 Status: D Length: 1 ..70	ISO Name: <b>Name</b> XML Name: Nm ISO Definition: Name by which a party is known and which is usually used to identify that party. CH Definition: Name of the originator To be used if no "BIC/BEI" is available. If this is used, the "Identification" must not be present.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Originator ++++++Identification	ISO Name: <b>Identification</b> XML Name: Id ISO Definition: Unique and unambiguous identification of a party. CH Definition: If this is used, the "Name" must not be present.



Level	XML Element	Definition
	<p>ISO Index: 3.21 Cardinality: 0..1 Status: D</p>	
<b>D</b>	<p>Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Originator ++++++Identification +++++++Organisation Identification</p> <p>ISO Index: 3.21 Cardinality: 1..1 Status: M</p>	<p>ISO Name: <b>Organisation Identification</b> XML Name: Orgld ISO Definition: Unique and unambiguous way to identify an organisation. CH Definition: Must be used if "Identification" is used.</p>
<b>D</b>	<p>Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Originator ++++++Identification +++++++Organisation Identification +++++++BICOrBEI</p> <p>ISO Index: 3.21 Cardinality: 0..1 Status: M</p>	<p>ISO Name: <b>BICOr BEI</b> XML Name: BICOrBEI ISO Definition: Code allocated to a financial institution or non financial institution by the ISO 9362 Registration Authority as described in ISO 9362 "Banking - Banking telecommunication messages - Business identifier code (BIC)". CH Definition: BIC/BEI of the originator Must be used if "Identification" is used.</p>
<b>D</b>	<p>Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Originator ++++++Identification +++++++Private Identification</p> <p>ISO Index: 3.21 Cardinality: 1..1 Status: N</p>	<p>ISO Name: <b>Private Identification</b> XML Name: Prvtld ISO Definition: Unique and unambiguous identification of a person, eg, passport.</p>
<b>D</b>	<p>Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Reason</p> <p>ISO Index: 3.22 Cardinality: 0..1 Status: M</p>	<p>ISO Name: <b>Reason</b> XML Name: Rsn ISO Definition: Specifies the reason for the status report. CH Definition: Reason for the status Must be used if "Status Reason Information" is used.</p>
<b>D</b>	<p>Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++StsRsnInf +++++Reason ++++++Code</p>	<p>ISO Name: <b>Code</b> XML Name: Cd ISO Definition: Reason for the status, as published in an external reason code list. CH Definition: Code as described in section "Status Reason Codes" If this is used, "Proprietary" must not be present. UBS Notes: UBS supports all Codes according to Swiss recommendations. For individual status information,</p>

Level	XML Element	Definition
	<p>ISO Index: 3.23                      Cardinality: 1..1                      Status: D                      Length: 1 ..4</p>	<p>UBS Example: <code>&lt;StsRsnInf&gt;                      &lt;Rsn&gt;                      &lt;Cd&gt;AC01&lt;/Cd&gt;                      &lt;/Rsn&gt;                      &lt;AddtlInf&gt;(Creditor Account IBAN) Invalid IBAN check digit&lt;/AddtlInf&gt;                      &lt;/StsRsnInf&gt;</code></p> <p>the ISO-Code NARR is sent in the Code element and the relevant information is entered in the Additional Information element.</p>
D	<p>Document                      +CstmrPmtStsRpt                      ++OrgnlPmtInfAndSts                      +++Transaction Information And Status                      ++++StsRsnInf                      +++++Reason                      ++++++Proprietary</p> <p>ISO Index: 3.24                      Cardinality: 1..1                      Status: D                      Length: 1 ..35</p>	<p>ISO Name: <b>Proprietary</b>                      XML Name: Prtry                      ISO Definition: Reason for the status, in a proprietary form.                      CH Definition: Swiss financial institutions will, wherever possible, abide by ISO standards ("Code" element). If used, then "Code" must not be present.</p> <p>UBS Notes: UBS does not provide this element.</p>
D	<p>Document                      +CstmrPmtStsRpt                      ++OrgnlPmtInfAndSts                      +++Transaction Information And Status                      ++++StsRsnInf                      +++++Additional Information</p> <p>ISO Index: 3.25                      Cardinality: 0..unbounded                      Status: O                      Length: 1 ..105</p>	<p>ISO Name: <b>Additional Information</b>                      XML Name: AddtlInf                      ISO Definition: Further details on the status reason.</p> <p>Usage: Additional information can be used for several purposes such as the reporting of repaired information.</p> <p>CH Definition: Can be used optionally to provide additional information about the "Status Reason".</p> <p>UBS Notes: Used by UBS to provide the additional information, if necessary.</p>
D	<p>Document                      +CstmrPmtStsRpt                      ++OrgnlPmtInfAndSts                      +++Transaction Information And Status                      ++++Original Transaction Reference</p> <p>ISO Index: 3.32                      Cardinality: 0..1                      Status: D</p>	<p>ISO Name: <b>Original Transaction Reference</b>                      XML Name: OrgnlTxRef                      ISO Definition: Set of key elements used to identify the original transaction that is being referred to.</p> <p>CH Definition: Original elements from the original message. Generally only those elements are sent back which caused warnings or errors. Optionally, other fields can be sent back.</p> <p>UBS Notes: Used by UBS to report back the C-Level element, where the error occurred.</p>
D	<p>Document                      +CstmrPmtStsRpt                      ++OrgnlPmtInfAndSts                      +++Transaction Information And Status                      ++++Original Transaction Reference                      +++++Amount</p> <p>ISO Index: 3.34                      Cardinality: 0..1                      Status: O</p>	<p>ISO Name: <b>Amount</b>                      XML Name: Amt                      ISO Definition: Amount of money to be moved between the debtor and creditor, before deduction of charges, expressed in the currency as ordered by the initiating party.</p> <p>CH Definition: Information from the original message</p>
D	<p>Document                      +CstmrPmtStsRpt                      ++OrgnlPmtInfAndSts                      +++Transaction Information And Status                      ++++Original Transaction Reference</p>	<p>ISO Name: <b>Interbank Settlement Date</b>                      XML Name: IntrBkSttlmDt                      ISO Definition: Date on which the amount of money ceases to be available to the agent that owes it and when the amount of money becomes available to the agent to which it is due.</p> <p>CH Definition: Effective settlement date</p>

Level	XML Element	Definition
	+++++Interbank Settlement Date ISO Index: 3.39 Cardinality: 0..1 Status: D	UBS Notes: Sent if the required settlement date has been set for the next banking business/Post Office working day. UBS does not provide this element in the pain.002 when a Credit Transfer (pain.001) is sent.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Requested Collection Date ISO Index: 3.40 Cardinality: 0..1 Status: O	ISO Name: <b>Requested Collection Date</b> XML Name: ReqdColltnDt ISO Definition: Date and time at which the creditor requests that the amount of money is to be collected from the debtor. CH Definition: Information from the original message Element is only used for Direct Debit (original message "pain.008"). UBS Notes: UBS does provide this element in the pain.002 only when a Direct Debit (pain.008) is sent.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Requested Execution Date ISO Index: 3.41 Cardinality: 0..1 Status: O	ISO Name: <b>Requested Execution Date</b> XML Name: ReqdExctnDt ISO Definition: Date at which the initiating party requests the clearing agent to process the payment. Usage: This is the date on which the debtor's account is to be debited. If payment by cheque, the date when the cheque must be generated by the bank. CH Definition: Information from the original message Element is only used for Credit Transfer (original message "pain.001").
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Creditor Scheme Identification ISO Index: 3.42 Cardinality: 0..1 Status: O	ISO Name: <b>Creditor Scheme Identification</b> XML Name: CdtrSchmeld ISO Definition: Credit party that signs the mandate. CH Definition: Information from the original message Element is only used for Direct Debit (original message "pain.008"). UBS Notes: UBS does not provide this element.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Payment Type Information ISO Index: 3.55 Cardinality: 0..1 Status: O	ISO Name: <b>Payment Type Information</b> XML Name: PmtTplnf ISO Definition: Set of elements used to further specify the type of transaction. CH Definition: Information from the original message UBS Notes: UBS provides this element if sent in the original pain.001.
D	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Payment Method ISO Index: 3.68 Cardinality: 0..1	ISO Name: <b>Payment Method</b> XML Name: PmtMtd ISO Definition: Specifies the means of payment that will be used to move the amount of money. CH Definition: Information from the original message UBS Notes: UBS does not provide this element.

Level	XML Element	Definition
	Status: O	
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++MndtRltdInf  ISO Index: 3.69 Cardinality: 0..1 Status: O	ISO Name: <b>Mandate Related Information</b> XML Name: MndtRltdInf ISO Definition: Set of elements used to provide further details of the mandate signed between the creditor and the debtor. CH Definition: Information from the original message Element is only used for Direct Debit (original message "pain.008").
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Remittance Information  ISO Index: 3.88 Cardinality: 0..1 Status: O	ISO Name: <b>Remittance Information</b> XML Name: RmtInf ISO Definition: Information supplied to enable the matching of an entry with the items that the transfer is intended to settle, such as commercial invoices in an accounts' receivable system. CH Definition: Information from the original message
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Ultimate Debtor  ISO Index: 3.120 Cardinality: 0..1 Status: O	ISO Name: <b>Ultimate Debtor</b> XML Name: UltmtDbtr ISO Definition: Ultimate party that owes an amount of money to the (ultimate) creditor. CH Definition: Information from the original message <b>UBS Notes:</b> UBS provides this element if sent in the original pain.001.
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Debtor  ISO Index: 3.121 Cardinality: 0..1 Status: O	ISO Name: <b>Debtor</b> XML Name: Dbtr ISO Definition: Party that owes an amount of money to the (ultimate) creditor. CH Definition: Information from the original message <b>UBS Notes:</b> UBS provides the name and address for this element
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Debtor Account  ISO Index: 3.122 Cardinality: 0..1 Status: O	ISO Name: <b>Debtor Account</b> XML Name: DbtrAcct ISO Definition: Unambiguous identification of the account of the debtor to which a debit entry will be made as a result of the transaction. CH Definition: Information from the original message
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And	ISO Name: <b>Debtor Agent</b> XML Name: DbtrAgt ISO Definition: Financial institution servicing an account for the debtor.

Level	XML Element	Definition
	Status ++++Original Transaction Reference +++++Debtor Agent  ISO Index: 3.123 Cardinality: 0..1 Status: O	CH Definition: Information from the original message
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Creditor Agent  ISO Index: 3.125 Cardinality: 0..1 Status: O	ISO Name: <b>Creditor Agent</b> XML Name: CdtrAgt ISO Definition: Financial institution servicing an account for the creditor. CH Definition: Information from the original message UBS Notes: UBS does provide this element in the pain.002 if sent in the original Credit Transfer (pain.001)
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Creditor  ISO Index: 3.127 Cardinality: 0..1 Status: O	ISO Name: <b>Creditor</b> XML Name: Cdtr ISO Definition: Party to which an amount of money is due. CH Definition: Information from the original message UBS Notes: UBS provides the name and address for this element.
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Creditor Account  ISO Index: 3.128 Cardinality: 0..1 Status: O	ISO Name: <b>Creditor Account</b> XML Name: CdtrAcct ISO Definition: Unambiguous identification of the account of the creditor to which a credit entry will be posted as a result of the payment transaction. CH Definition: Information from the original message
<b>D</b>	Document +CstmrPmtStsRpt ++OrgnlPmtInfAndSts +++Transaction Information And Status ++++Original Transaction Reference +++++Ultimate Creditor  ISO Index: 3.129 Cardinality: 0..1 Status: O	ISO Name: <b>Ultimate Creditor</b> XML Name: UltmtCdtr ISO Definition: Ultimate party to which an amount of money is due. CH Definition: Information from the original message UBS Notes: UBS does not provide this element.

UBS Switzerland AG  
P.O. Box  
8098 Zurich  
Switzerland

Phone +41 848 807 848  
E-Mail [sh-keydirect@ubs.com](mailto:sh-keydirect@ubs.com)

This publication is intended for information only and is not intended as a recommendation, an offer or a solicitation of an offer. Before making a decision, you should obtain relevant professional advice. Please note that UBS reserves the right to alter its services, products or prices at any time without prior notice. Certain products and services are subject to legal restrictions and cannot be offered worldwide on an unrestricted basis. Reproduction in whole or part is prohibited without prior permission from UBS.

© UBS 2016. The key symbol and UBS are among the registered and unregistered trademarks of UBS. All rights reserved.